


2018

Mat = C45


835 mm	9,0 kg
415 mm	4,0 kg

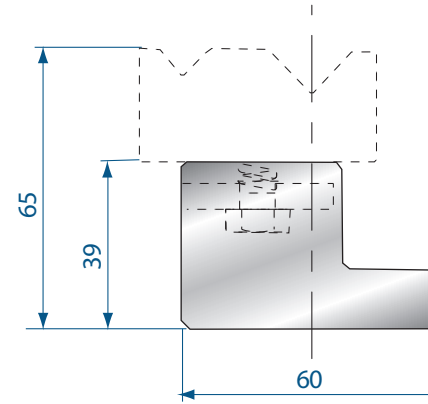

2039

Mat = C45


835 mm	12,0 kg
415 mm	6,0 kg

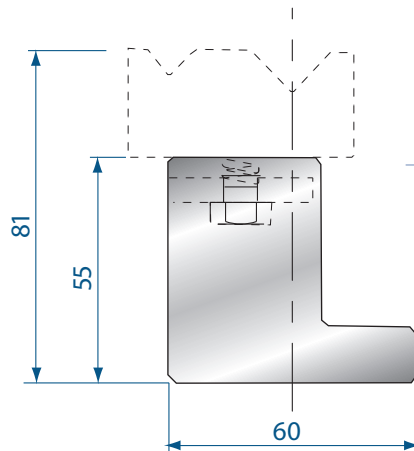

2019

Mat = C45


835 mm	15,0 kg
415 mm	7,0 kg

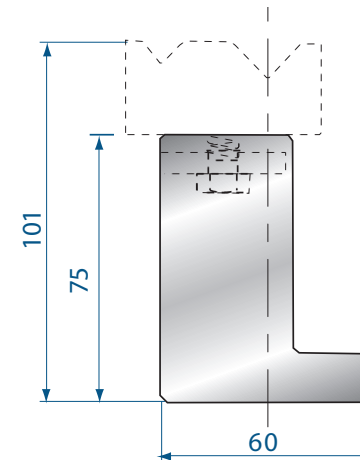

2035

Mat = C45

835 mm	19,0 kg
415 mm	9,0 kg




4277

MOLLA + RONDELLA + VITE
SPRING + WASHER + SCREW




SUPPORTI PER MATRICI AUTOCENTRANTI
DIE HOLDERS FOR SELF-CENTERING DIES

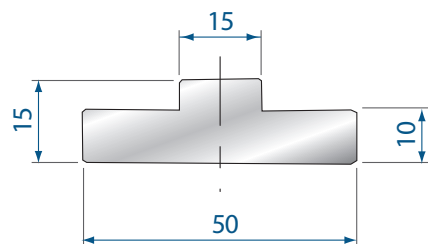

2058

Mat = C45

835 mm	4,0 kg
415 mm	2,0 kg

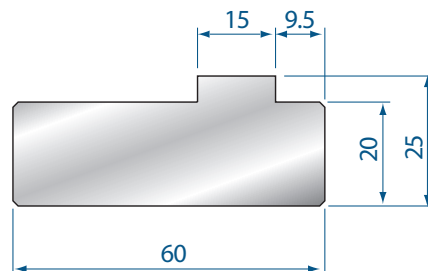


2059

Mat = C45

835 mm	8,0 kg
415 mm	4,0 kg

FERMO PER MATRICI AUTOCENTRANTI
FIXED BAR FOR SELF-CENTERING DIES

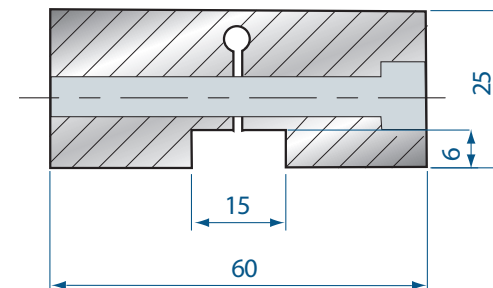



2060


Mat = C45

15 mm	0,2 kg
-------	--------

DEVE ESSERE INSTALLATO SUI RIALZI
TO BE INSTALLED ON DIE HOLDER
2018 - 2019 - 2035 - 2039

ESEMPIO DI MONTAGGIO
ASSEMBLY EXAMPLE

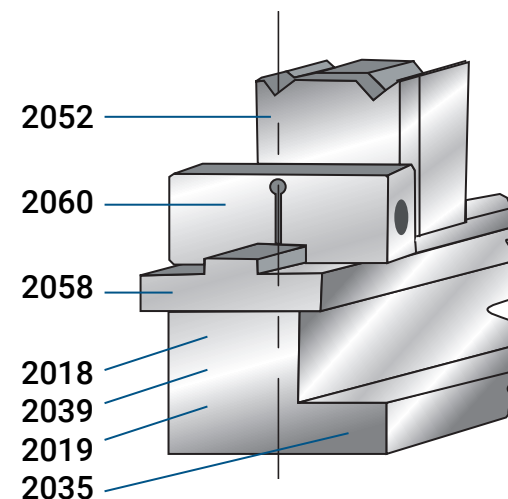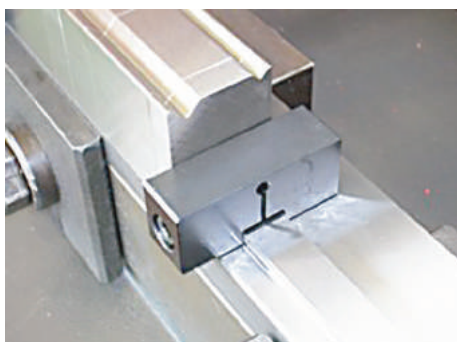


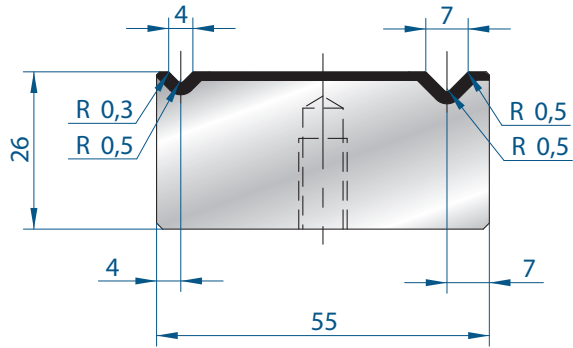

2010

Mat = C45
Max T/m = 100
 $\alpha = 90^\circ$


835 mm	9,0 kg
415 mm	4,0 kg

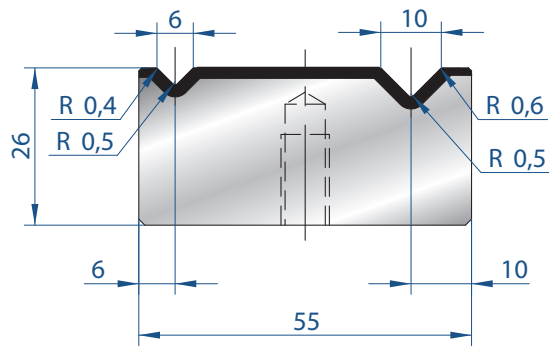

2011

Mat = C45
Max T/m = 100
 $\alpha = 90^\circ$


835 mm	9,0 kg
415 mm	4,0 kg

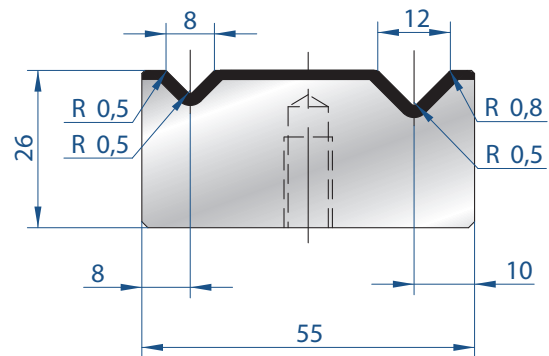


2012

Mat = C45
Max T/m = 100
 $\alpha = 90^\circ$

835 mm	9,0 kg
415 mm	4,0 kg

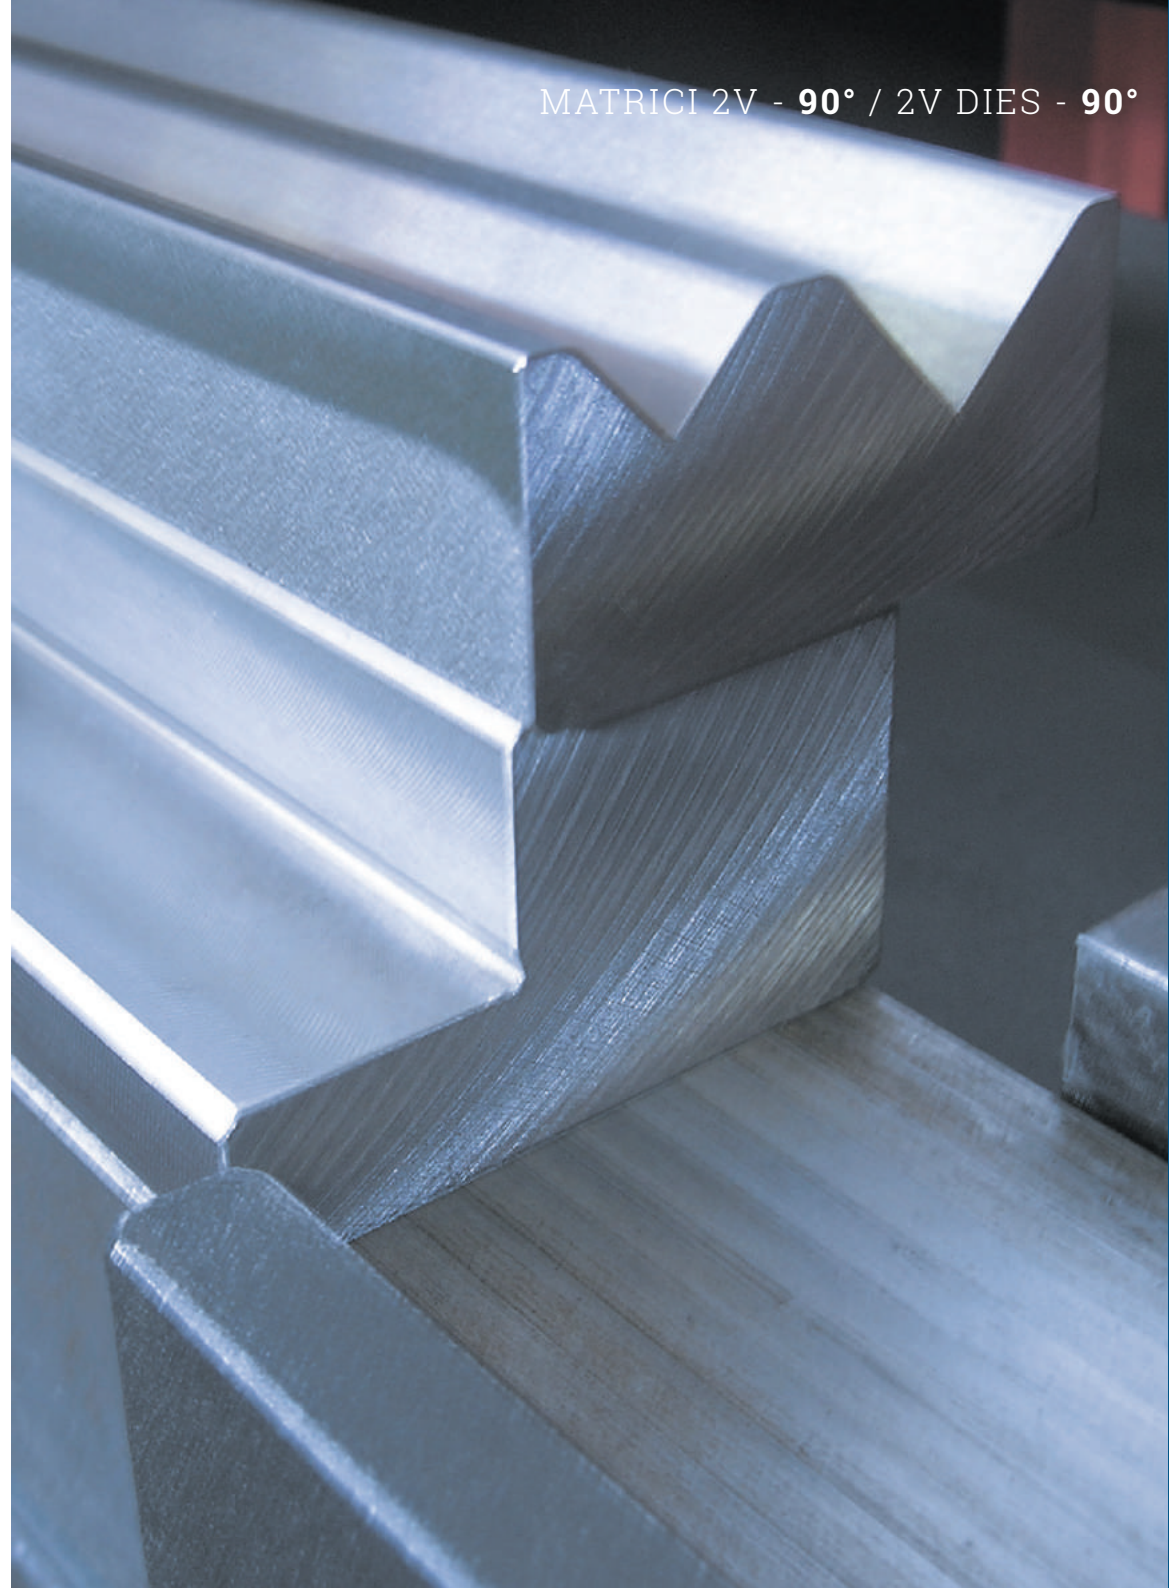


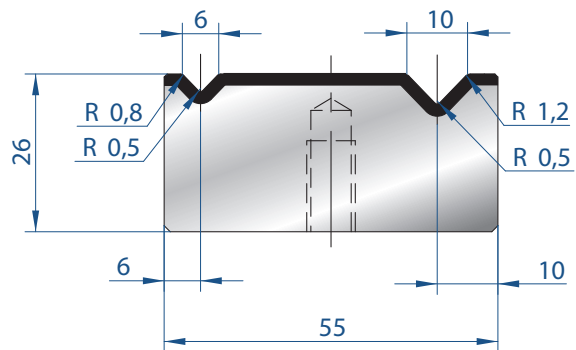

2046

Mat = C45
Max T/m = 100
 $\alpha = 88^\circ$


835 mm	9,0 kg
415 mm	4,0 kg

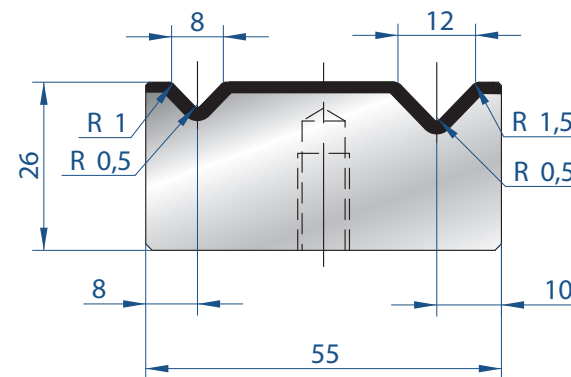

2041

Mat = C45
Max T/m = 100
 $\alpha = 88^\circ$


835 mm	9,0 kg
415 mm	4,0 kg

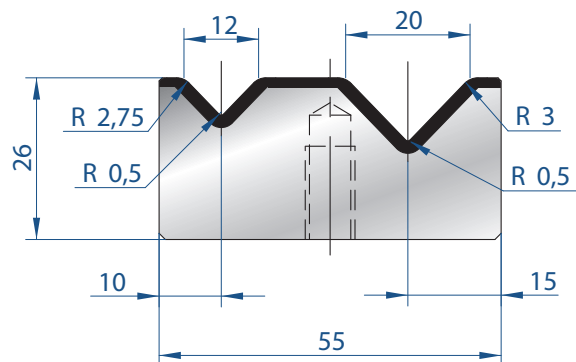

2013

Mat = C45
Max T/m = 100
 $\alpha = 88^\circ$


835 mm	9,0 kg
415 mm	4,0 kg

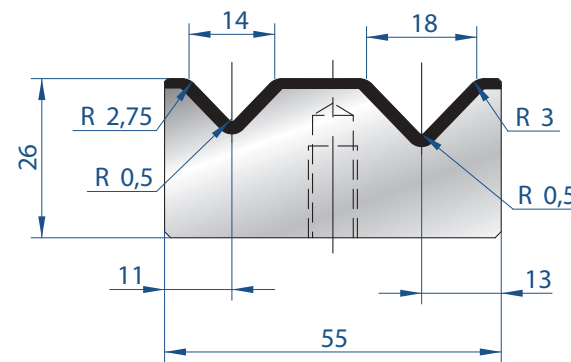

2032

Mat = C45
Max T/m = 100
 $\alpha = 88^\circ$


835 mm	9,0 kg
415 mm	4,0 kg

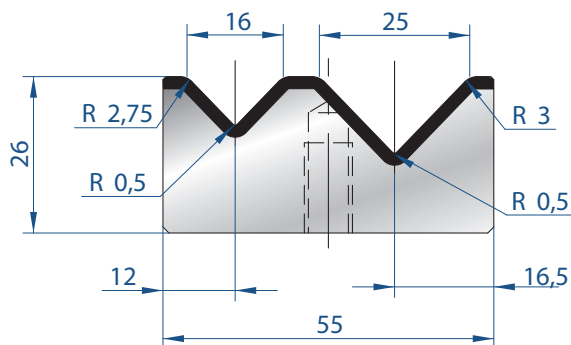

2014

Mat = C45
Max T/m = 100
 $\alpha = 88^\circ$


835 mm	8,0 kg
415 mm	4,0 kg

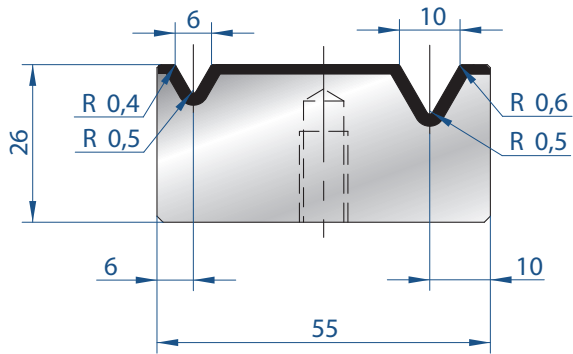

2015

Mat = C45
Max T/m = 60
 $\alpha = 60^\circ$


835 mm	8,0 kg
415 mm	4,0 kg

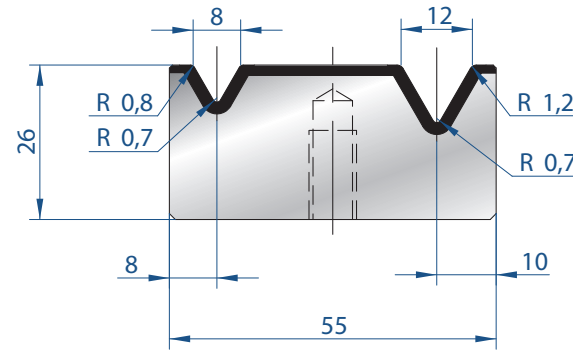

2016

Mat = C45
Max T/m = 60
 $\alpha = 60^\circ$


835 mm	8,0 kg
415 mm	4,0 kg

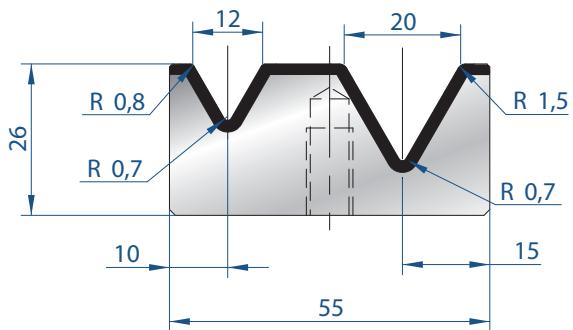

2033

Mat = C45
Max T/m = 60
 $\alpha = 60^\circ$


835 mm	8,0 kg
415 mm	4,0 kg

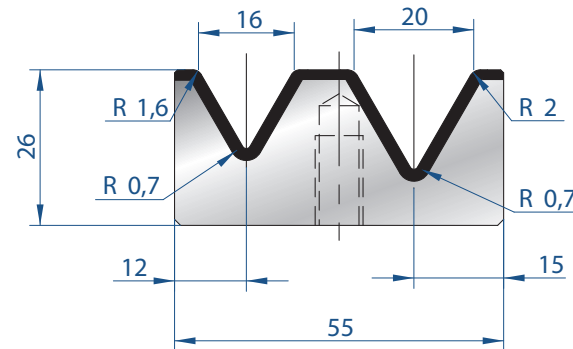

2017

Mat = C45
Max T/m = 60
 $\alpha = 60^\circ$

835 mm	8,0 kg
415 mm	4,0 kg


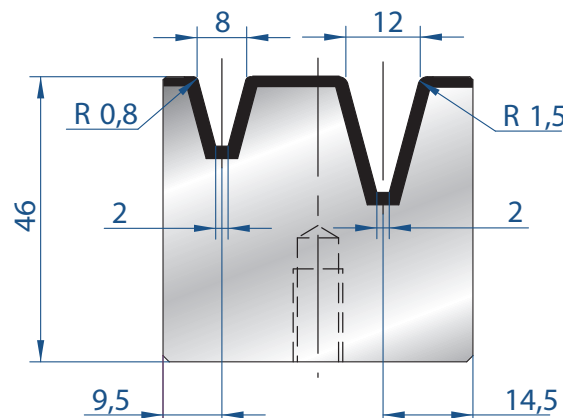


2047

Mat = C45
Max T/m = 40
 $\alpha = 30^\circ$

835 mm	8,0 kg
415 mm	4,0 kg




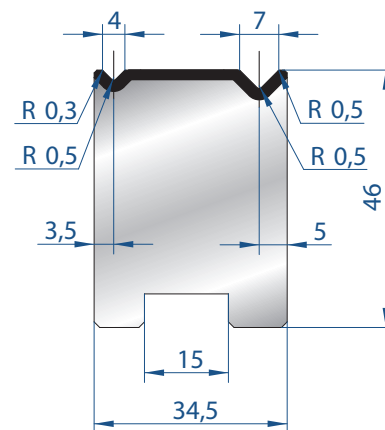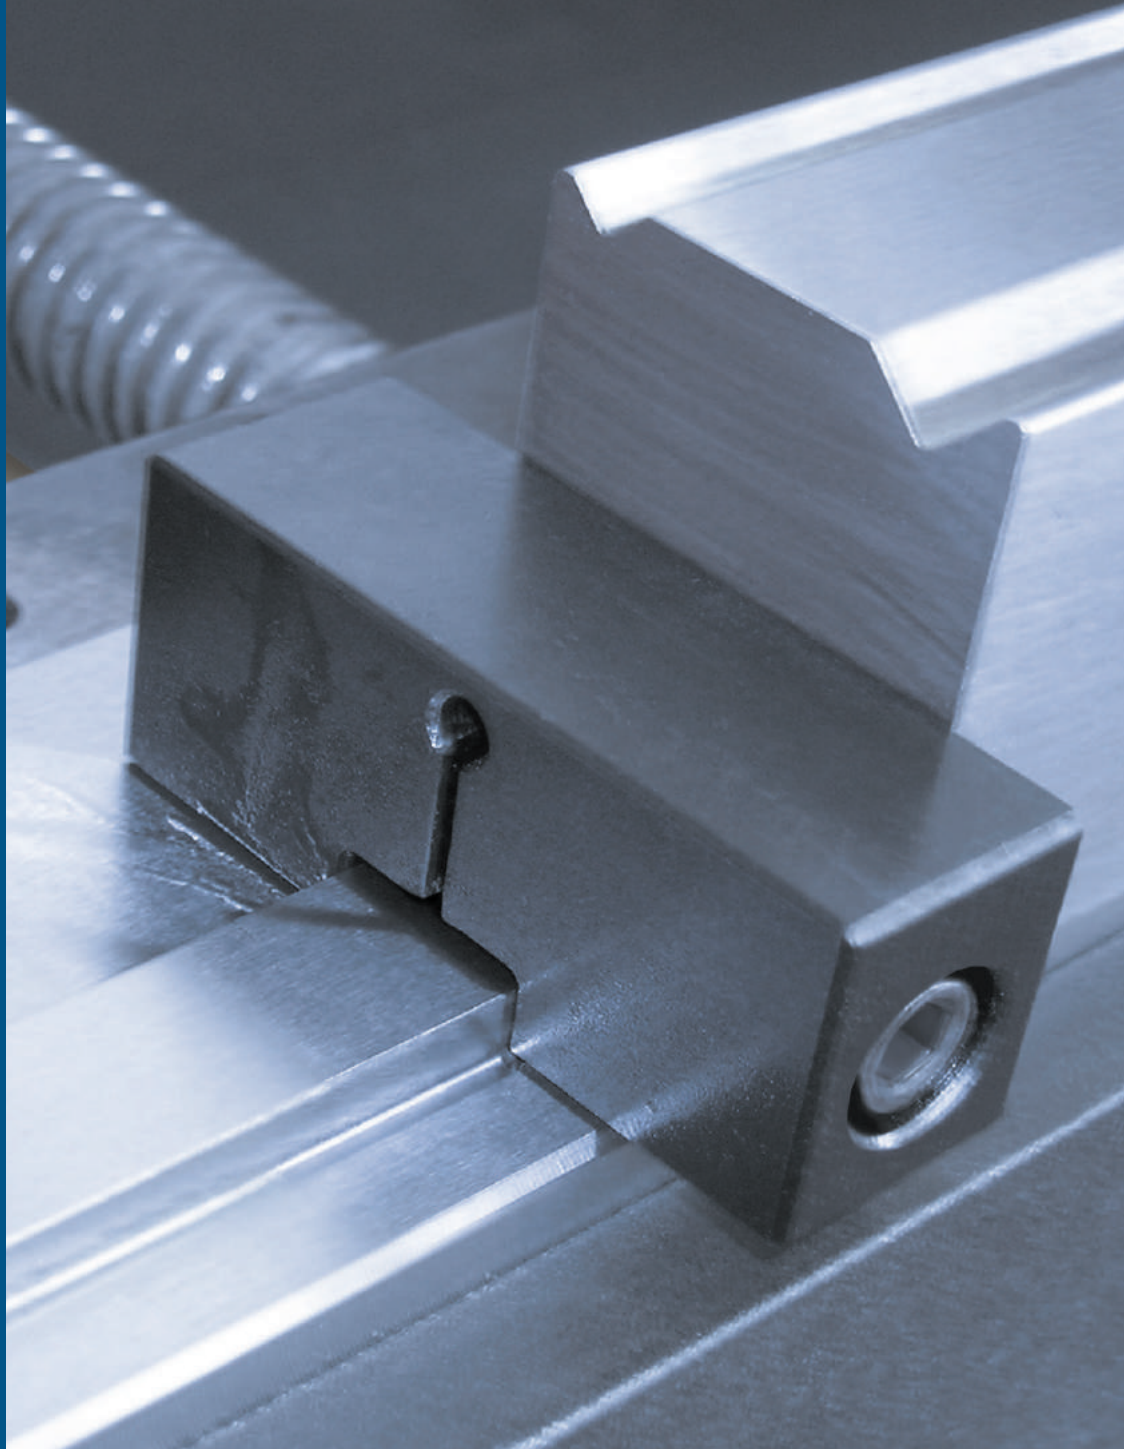

2048

Mat = C45
Max T/m = 80
 $\alpha = 90^\circ$


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

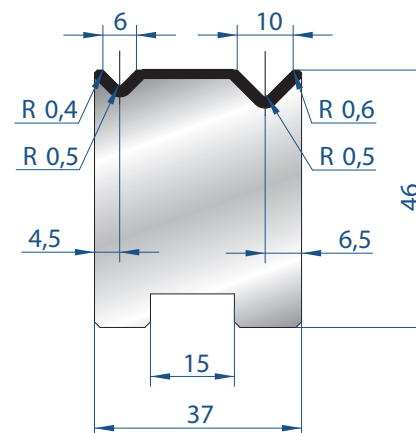

2049

Mat = C45
Max T/m = 80
 $\alpha = 90^\circ$


835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

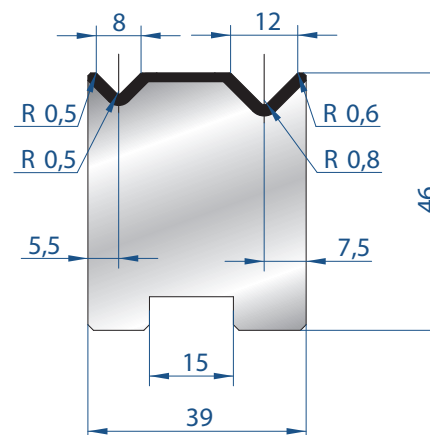

2051

Mat = C45
Max T/m = 80
 $\alpha = 90^\circ$


835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

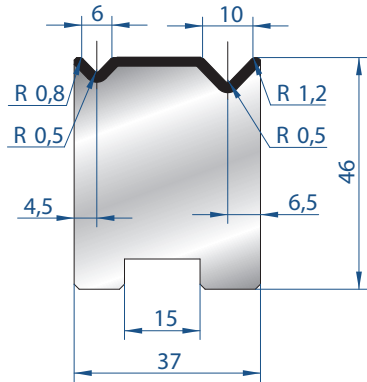

2050

Mat = C45
Max T/m = 80
 $\alpha = 88^\circ$


835 mm	10,0 kg
415 mm	5,0 kg
805 mm FRAZ. / SECT.	10,0 kg

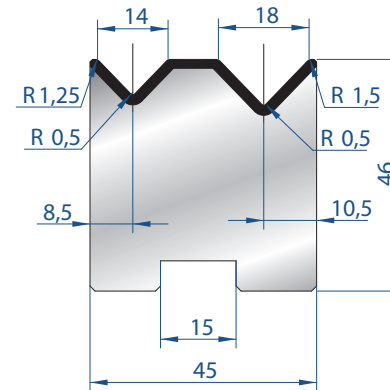

2053

Mat = C45
Max T/m = 80
 $\alpha = 88^\circ$

835 mm	12,0 kg
415 mm	6,0 kg
805 mm FRAZ. / SECT.	12,0 kg

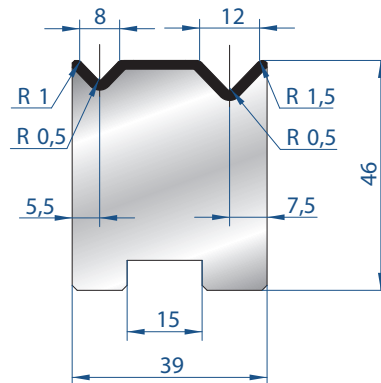


2052

Mat = C45
Max T/m = 80
 $\alpha = 88^\circ$

835 mm	10,0 kg
415 mm	5,0 kg
805 mm FRAZ. / SECT.	10,0 kg




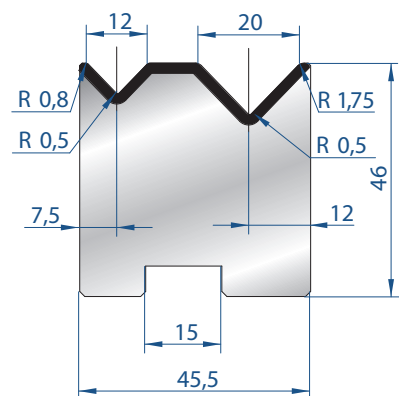

2054

Mat = C45
Max T/m = 80
 $\alpha = 88^\circ$


835 mm	12,0 kg
415 mm	6,0 kg
805 mm FRAZ. / SECT.	12,0 kg

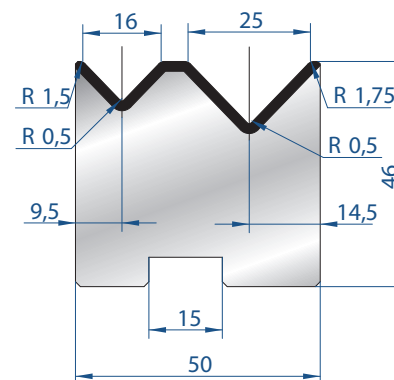

2055

Mat = C45
Max T/m = 80
 $\alpha = 88^\circ$


835 mm	13,0 kg
415 mm	6,0 kg
805 mm FRAZ. / SECT.	13,0 kg

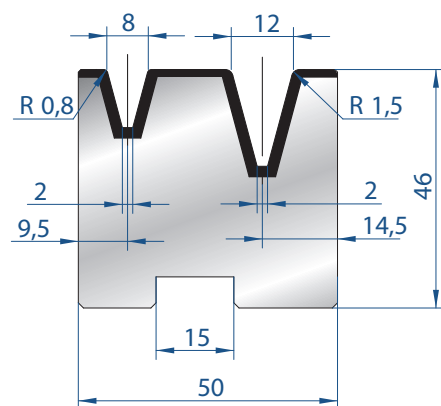

2056

Mat = C45
Max T/m = 40
 $\alpha = 30^\circ$


835 mm	13,0 kg
415 mm	6,0 kg
805 mm FRAZ. / SECT.	13,0 kg

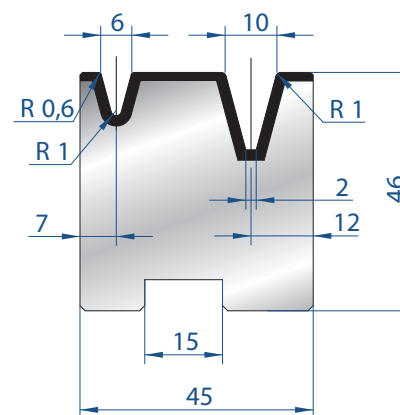

2057

Mat = C45
Max T/m = 40
 $\alpha = 30^\circ$


835 mm	13,0 kg
415 mm	6,0 kg
805 mm FRAZ. / SECT.	13,0 kg

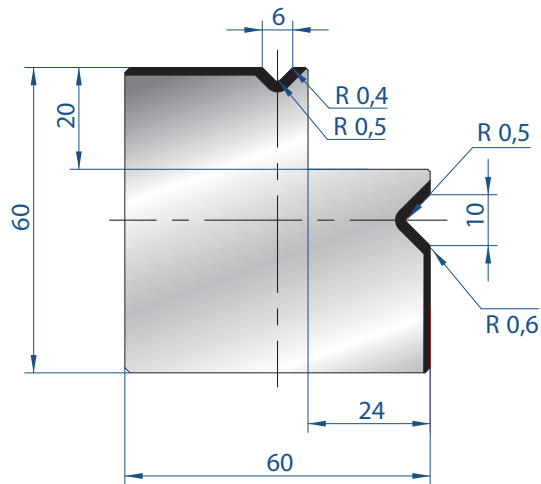

2028

Mat = C45
Max T/m = 80
 $\alpha = 90^\circ$

835 mm	20,0 kg
415 mm	10,0 kg
805 mm FRAZ. / SECT.	20,0 kg

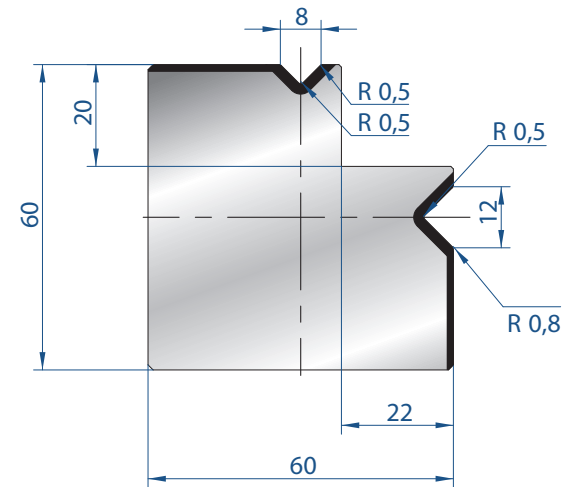


2029

Mat = C45
Max T/m = 80
 $\alpha = 90^\circ$

835 mm	20,0 kg
415 mm	10,0 kg
805 mm FRAZ. / SECT.	20,0 kg

MATRICI 3U / 3U DIES

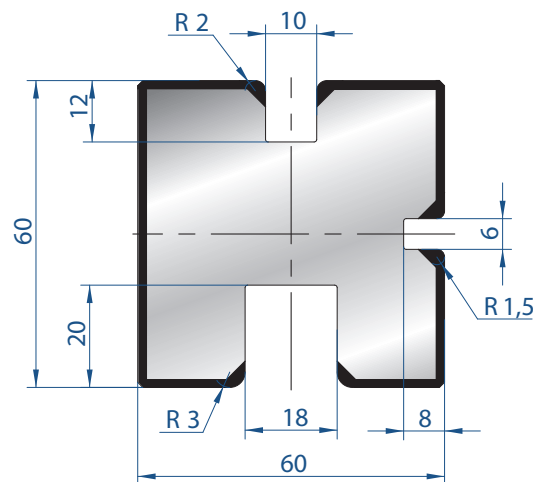

2031

Mat = C45
Max T/m = 100
 $\alpha = 90^\circ$

835 mm	20,0 kg
415 mm	10,0 kg
805 mm FRAZ. / SECT.	20,0 kg

