


1026

Mat = C45
H = 67.00
Max T/m = 80
 $\alpha = 60^\circ$
R = 0.8


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

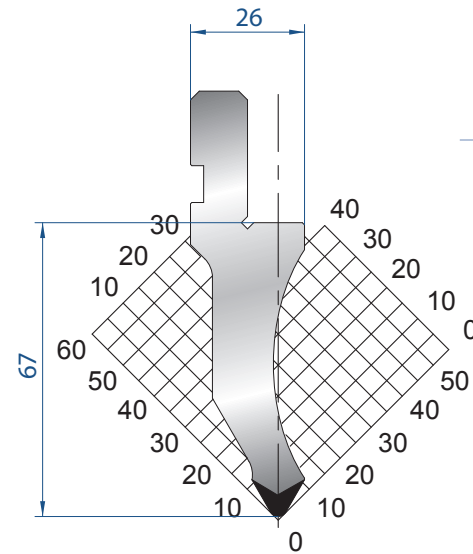

1027

Mat = C45
H = 67.00
Max T/m = 80
 $\alpha = 60^\circ$
R = 2


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

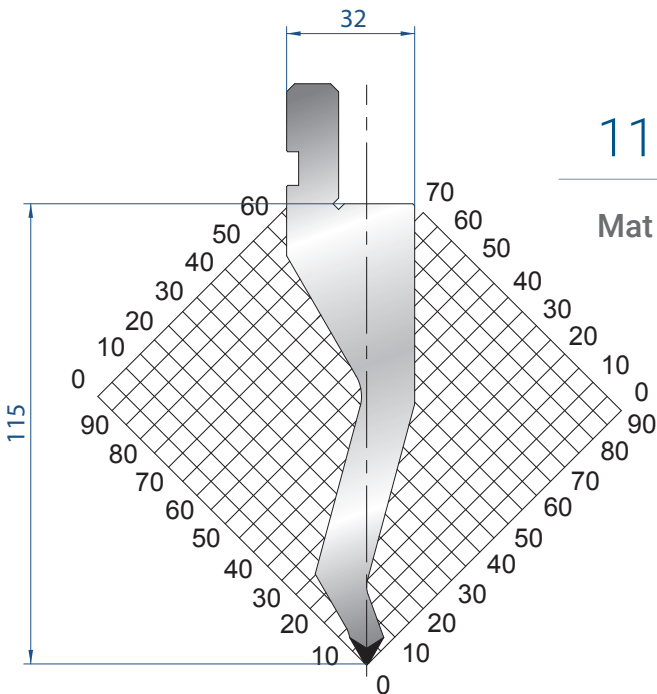

1191

Mat = C45
H = 115.00
Max T/m = 60
 $\alpha = 60^\circ$
R = 0.8

835 mm	15,0 kg
415 mm	7,0 kg
805 mm	15,0 kg
FRAZ. / SECT.	

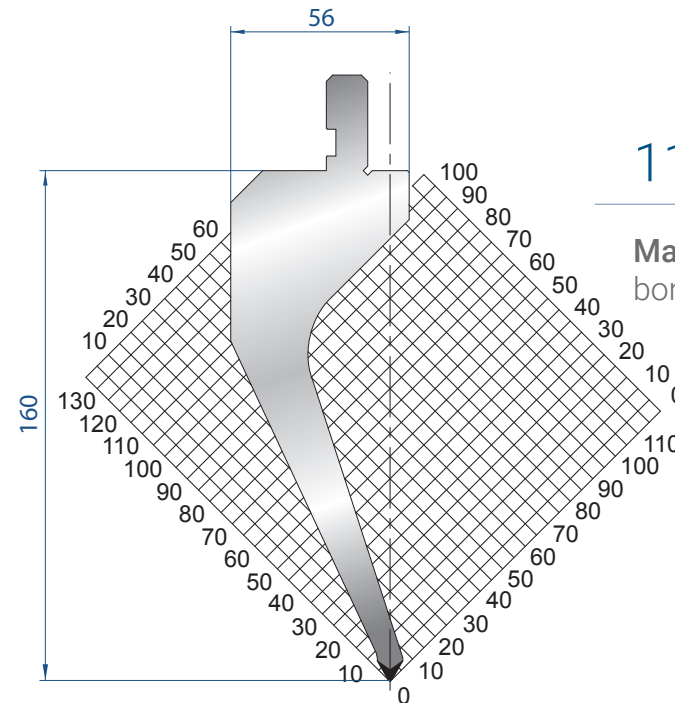


1190

Mat = C45
bonificato / tempered
H = 160.00
Max T/m = 40
 $\alpha = 60^\circ$
R = 0.8

835 mm	27,0 kg
415 mm	13,5 kg
805 mm	27,0 kg
FRAZ. / SECT.	




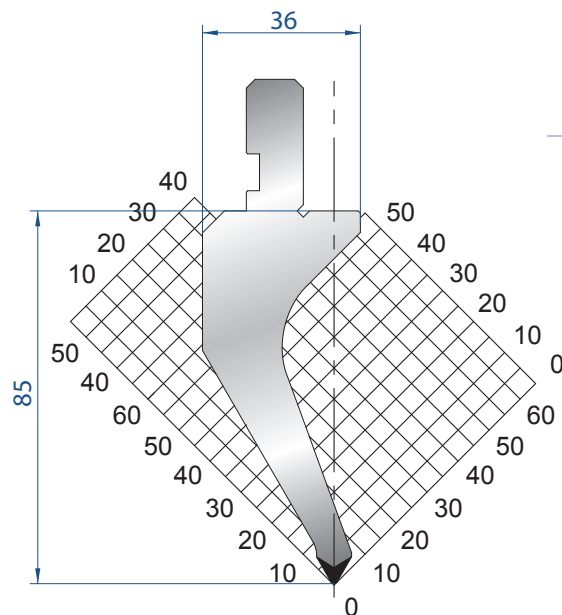

1162

Mat = 42CrMo4
bonificato / tempered
H = 85.00
Max T/m = 40
α = 60°
R = 0.8


835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

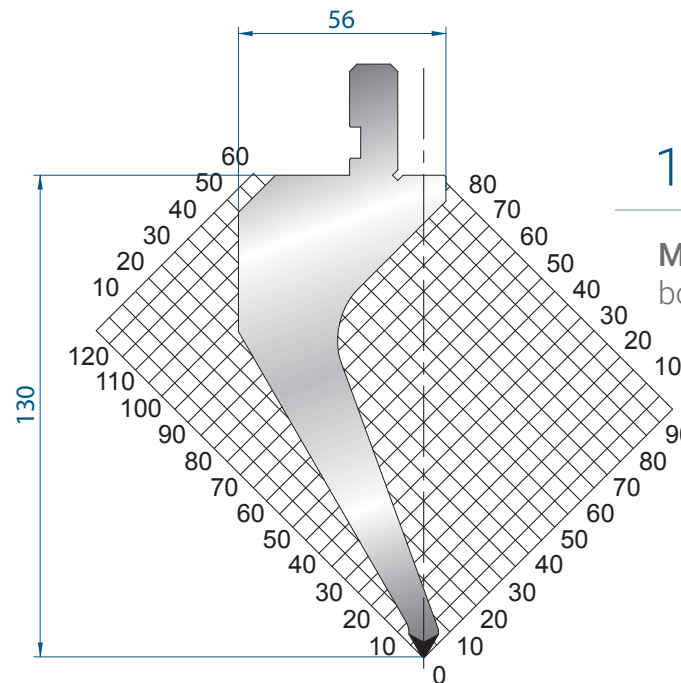

1163

Mat = C45
bonificato / tempered
H = 130.00
Max T/m = 40
α = 60°
R = 0.8


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

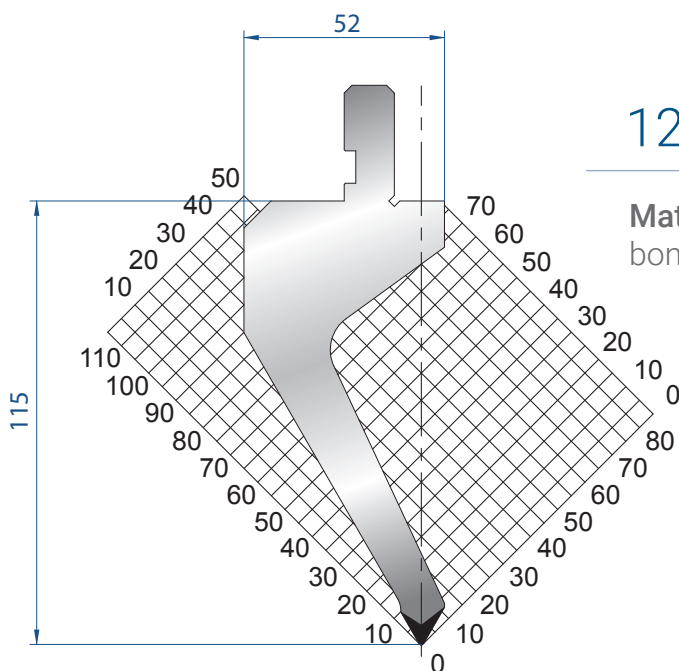

1272

Mat = C45
bonificato / tempered
H = 115.00
Max T/m = 40
α = 60°
R = 0.8


835 mm	20,0 kg
415 mm	10,0 kg
805 mm	20,0 kg
FRAZ. / SECT.	

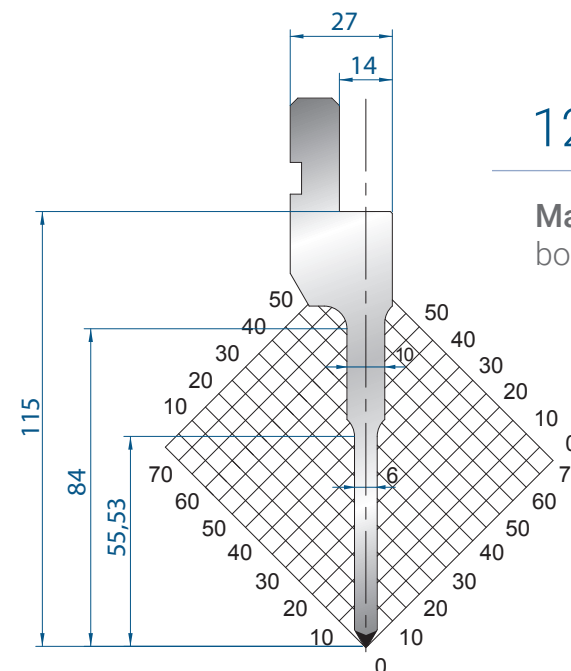

1271

Mat = C45
bonificato / tempered
H = 115.00
Max T/m = 50
α = 60°
R = 0.8


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

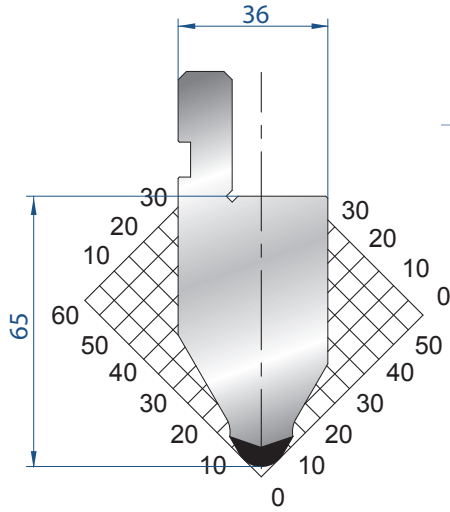

1032

Mat = C45
 H = 65.00
 Max T/m = 120
 $\alpha = 60^\circ$
 R = 6


835 mm	14,0 kg
415 mm	7,0 kg
805 mm	14,0 kg
FRAZ. / SECT.	

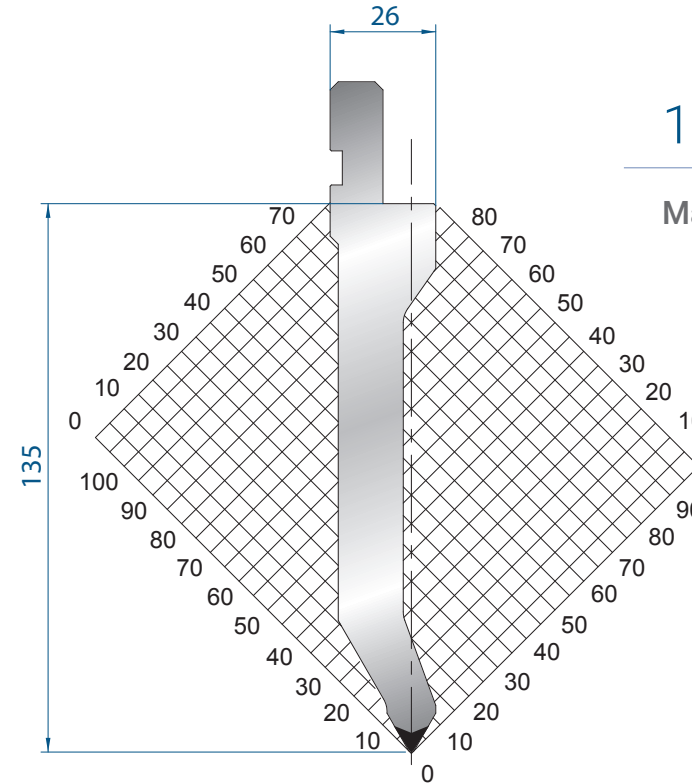

1284

Mat = C45
 H = 135.00
 Max T/m = 70
 $\alpha = 60^\circ$
 R = 0.8

835 mm	19,0 kg
415 mm	9,0 kg
805 mm	19,0 kg
FRAZ. / SECT.	

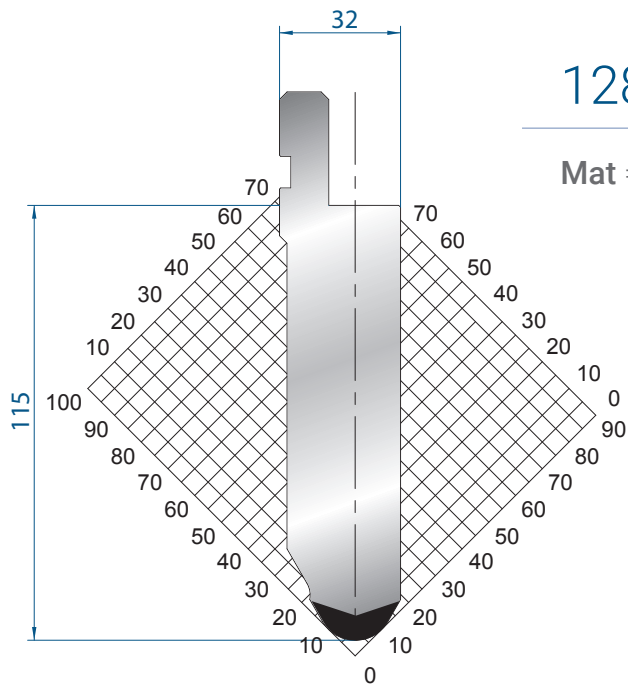

1283

Mat = C45
 H = 115.00
 Max T/m = 150
 $\alpha = 60^\circ$
 R = 10

835 mm	25,0 kg
415 mm	12,0 kg
805 mm	25,0 kg
FRAZ. / SECT.	





1293

